
FEEL THE DIFFERENCE

THE PROVEN CHOICE. EVERY TIME.

HIGH-PRECISION TOOLS FOR ELECTRONICS DEVICE MANUFACTURING

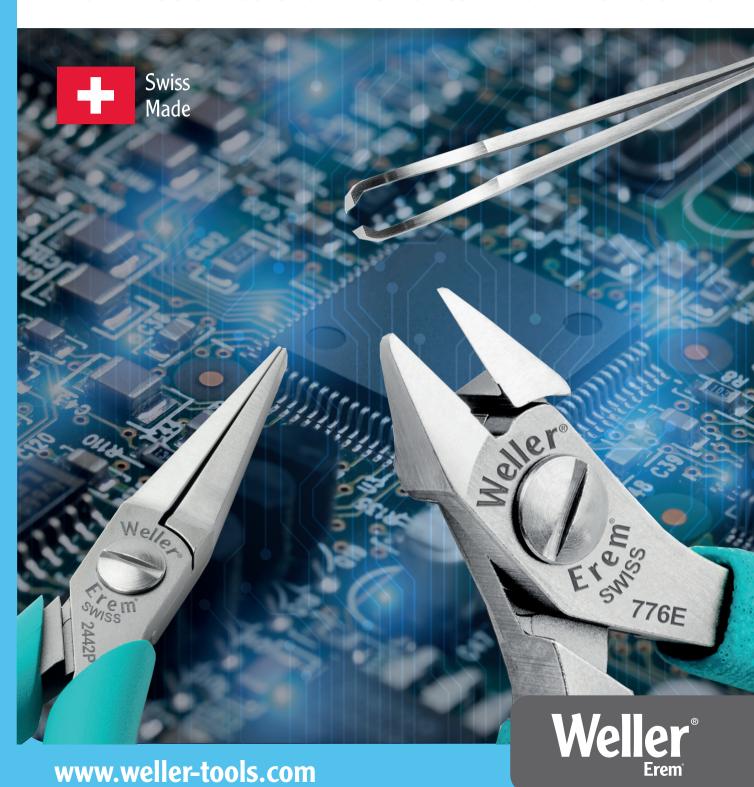

FEEL THE DIFFERENCE

THE PROVEN CHOICE. EVERY TIME.

Manufactured with uncompromising Swiss quality, and created especially for electronics applications, Weller Erem® tools are built to last. The signature high-performance cutters set the industry standard by providing over 1 million consistent precise and accurate movements.

With state-of-the-art advanced features like Magic Spring™, High-Precision Screw Joint, and Maximum Opening Stop Technology, Weller Erem Precision Tools provide the longest durability, highest precision and best quality on the planet.





Weller Erem products are made and manufactured with uncompromising Swiss quality, created to be strong, durable, sharp and precise







Weller Erem is a leader in the development and production of high-precision, top-quality precision tools (side and tip cutters, pliers and tweezers). Founded in Geneva, Switzerland in 1963, Weller Erem precision tools are the result of ongoing product development and innovation to meet customer demands and the requirements of modern manufacturing techniques.

Custom-made

Have a problem? We have the solution with our ability to quickly manufacture the custom tool you need.

With an estimated 2-week turnaround time, Weller Erem will customize any of our precision tools to meet your applications needs.

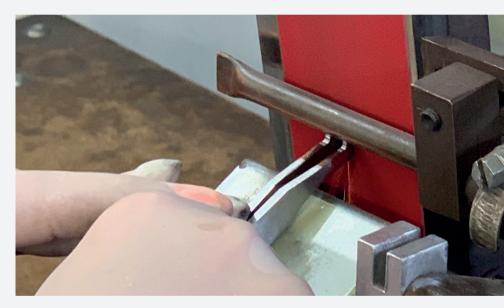

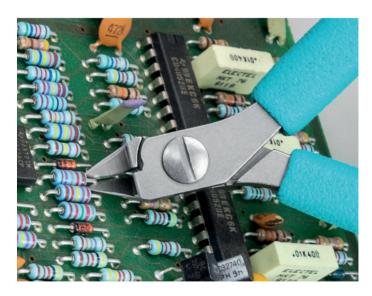

Cutters for electronics applications

A simple method to remove SMD ICs is to cut each of the individual leads to remove the device and then reflow the joint with a soldering iron and remove the component lead from the board.

The solder left on the board can then be removed with a desoldering tool or desolder braid and a new component fitted. The 670EP and 670EPF have fine pointed tapered and relieved heads that are able to fit between individual leads and cut them without causing damage to the printed circuit.

THE PERFECT CUT

Strong, sharp and precise - every time

Cutter Electronics Applications: Remove Fine Pitch SMD ICs | Light engineering and Dental Applications



Cut shape

Three blade options, including Weller Erem's exclusive Super Full Flush cut.



Semi-flush

- Leaves a pyramidal tip at the end of the wire
- For standard jobs where the final shape does not play a significant role
- For both soft copper wires and very hard wires, such as stainless steel



Flush

- Leaves a much smaller tip at the end of the wire when compared to a Semi-Flush cut — without reducing the cutting ability
- The cutting edges are finer than on semi-flush cutters
- Effort exerted when cutting is less and the load on the component is reduced
- Flush wire ends reduce the effort needed to fit components on printed-circuit boards



THE PERFECT COMBINATION

Precision, design, symmetry and balance

Tweezer Electronics Applications: Microelectronics, Jewelrymaking and Watchmaking Applications



BUILT TO LAST

Longest lasting durability on the planet

Pliers Electronics Applications: For Miniature and standard electronics | Forming, Bending, Laying and Feeding in Wires



CUTTERS		Key	Dimensions				onics					
Model	Cut Description		Applications	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	Micro- Electronics	NS SIN	Cart	Micros	
TOP SELLER		Tip cutter – pointed relieved head This is the narrowest head shape The underside is relieved and facilitates	General - for all cutting appliations with	0.354	0.354	0.236	0.630					SN
Weller French	Full Flush	optimum access even to extremely hard-to-reach areas.	easy access	9	9	6	16	*	*		Y	
612N		Side cutter – oval head This is the most widely used head shape Fits for all cutting applications where easy	General - for all cutting appliations with	0.394	0.354	0.236	0.669	1	\		/	
Series Series	Semi- Flush	access is given	easy access	10	9	6	17	*	,		,	
512N We		Side cutter - oval head This is the most widely used head shape Fits for all cutting applications where easy	General - for all cutting	0.472	0.433	0.236	0.748					
V See The See	Semi- Flush	access is given It is robust and offers the highest cutting capacity	appliations with easy access	12	11	6	19	٧	٧		٧	
2412E		capacity The ergonomic handles and the special	General - for all cutting appliations with easy access	0.472	0.433	0.236	0.748		/		\	MEC
Walter	Semi- Flush			12	11	6	19	•				
		Side Cutters and Tip Cutters Tip cutter - angled narrow head The angled head allows precise cuts at different working angles Suitable for working on printed-circuit boards, component connections, can be used in both 90° and 180° applications Frgonomic handle and special materials ensure a soft feel, operating comfort and safety	General - for all cutting appliation with limited access, SMD	0.236	0.433	0.236	1.024				\(\)	
2482E	Flush			6	11	6	26		\			
		Tip cutter - angled wide robust head Oval shape. 30° Similar to 503E, but with ergonomic handles The angled head provides for precise cuts at	Electronic, Microelectronic,	0.354	0.433	0.236	0.787					
2403E	Flush	different working angles • The ergonomic handles and special materials ensure a soft feel, operating comfort and safety	Wires, PCB boards	9	11	6	20	V	V			
599Т	Side cutter - oval head - hard metal blades Fits for all cutting applications where easy access is given	Carbide, Wire, Boards, Fine	0.748	0.433	0.236	0.748					M	
Weller	Semi- Flush	This is the most widely used head shape It is robust and size for size offers the highest cutting capacity	& Standard electronic	19	11	6	19	V	V	Y		
		Tip cutter - angled wide head Tungsten-carbide cutters	Hard and tough wires e.g. piano	4.331	0.433	0.236	0.795					
503ET	Semi- Flush	The angled head provides for precise cuts at different working angles	wire, nickle and diode leads	9.6	11	6	20.2	V	\	\		
	4 - 6 ba • Pneuma • Handy, l	Pneumatic side cutter and tip cutter. Requires 4 - 6 bar oil-free clean compressed air Pneumatic cutter Handy, light and precise Extremely versatile thanks to a selection of	Hard and tough									T
1500BSF		Examinely versame trains to a selection of different cutting heads Easily interchangeable cutting heads Suitable for cutting conventional components, soft metals or small plastic parts Pneumatic-cutter housing	wires e.g. piano wire, nickle and diode leads					/	/			

		UTTE	PC			Dime	nsions		တ			90	ø.
	Model	Cut	Description	Key Applications	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	Micro- Electronics				Head Size
T622N			Side cutter – oval head Most widely used head shape Fits for all cutting applications where easy	Micro & Fine	0.394	0.354	0.236	0.669					MICRO
	Wel/or	Full Flush	access is given It is robust and size for size offers the highest cutting capacity	electronic	10	9	6	17	V	Y		Y	
	171		Distance cutter, variable cutting length from 1.2 mm to 6 mm/ 047 to .236 Inch Special tool steel, ESD-safe, Variable cutting	Micro electronics, PCB, SMD, for cutting wires to	4.921	0.433	0.236	1.142				/	MED
530E15A	T S	Full Flush	length (= V) • Protective stop screw	the right length and for fixing components	125	11	6	29	*	,		Microscope Microscope	
			Side cutter with compound action	Guide Wires, Stents, Catheters, Single/ Multiple	0.394	0.630	0.295	0.630					MAXI
E147A	S III	Semi- Flush	For cutting hard wires with minimal effort	Fillers, Lateral/ Internal Cuts, Electronic appllications	10	16	7.5	16	V	V	V	Microscope Microscope	
886E	Weller Weller		Side cutter - tapered head Jaws have straight edges and taper to a point. Head shape allows access to difficult-	Hard and tough		0.531	0.284	0.827	/				MAXI
		Full Flush	to-reach areas in comparison to the same size oval head cutter	components		13.5	7.2	21		٧			
2422E			Side cutter - oval head Offers the highest cutting capacity Most widely used head shape Fits all cutting applications where easy	Micro	0.748	0.433	0.236	0.748					MED
	Welle	Full Flush	access is given The ergonomic handles and the special materials ensure a soft feel, operating comfort and safety	electronics	12	11	6	19			Y	Microscope	
599FO			Fibre optic tools High precision for optical fibres - special tool steel	Stainless Steel Coil Wires, Kevlar®, Vectran™	0.472	0.433	0.24	0.748					MED
	Wed.	Semi- Flush	Side cutter, suitable for cutting Kevlar® silks Avoid any other application than cutting Kevlar silks to avoid damaging the tool	Braided Wires, Fiber Optics	12	11	6	19	V			Microscope	WED
			Side cutter flush cut, for PCB separation only	Micro &									
884EPCM	Nelle-		Side cutter, suitable for cutting printed-circuit boards	Standard electronics					/				MAXI
505C		IC and SMD tools for inserting, extracting, straightening and cutting IC and SMD components		Micro & Standard	4.724	0.433							MEDIUM
			Inserting and extracting 14-16 pins Non-reflecting surface ESD-safe	electronics, SMD rework	120	11			Y	Y			WE

The items listed are the most popular Weller Erem products for the electronic's industry.



	UTTE	PC			Dime	nsions		s			be .	e
Model	Cut	Description	Key Applications	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	Micro- Electronics	SMD	Carbide	Microsco	Head Size
TOP SELLER 522N		Side cutter - oval head This is the most widely used head shape Fits for all cutting applications where easy access is given	General - for all cutting appliation with easy	0.472	0.433	0.236	0.748	/	$\sqrt{}$		\checkmark	MEDIUM
SZZN	Full Flush	It is robust and offers the highest cutting capacity	access	12	11	6	19	,	·		adooscoal	Σ
539EREC		Distance cutter with patented receptacle Prevents residual wire contamination	Micro & Standard electronics, PCB	0.472	0.433	0.236	0.728					MEDIUM
Series Se	Full Flush	Prevents residual wire contamination	electronics, FGB	12	11	6	18.5	v	V			ME
2622NB Wele		Side cutter – pointed relieved head This is the narrowest head shape The underside is relieved and facilitates optimum access even to extremely	Micro & Standard electronics	0.236	0.354	0.236	0.630		/			SMALL
See and See an	Full Flush	hard-to-reach areas		6	9	6	16					

DI	LIERS	Vari			Dimer	nsions			S			9	0
MODEL	DESCRIPTION	Key Applica- tions	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	E (in / mm)	G (in / mm)	Micro- Electronics		Carbide		Head Size
2443P	Round nose pliers with very precise, smooth jaws Pliers for miniature and standard electronics Optimized ergonomically shaped handles for increased comfort	Fine and Standard	5.748	0.433	0.236	1.594	0.031	0.063					МЕDIUМ
2443P	Non-reflecting surface, ESD-safe Suitable for bending wires	electronic, bending wire	146	11	6	40.5	0.8	1.6	Y	٧		B = Head wi C = head thi E = Width of G = Total hei of both	ME
	Flat nose pliers Pliers for miniature and standard electronics Optimized ergonomically shaped handles for increased comfort	Miniature	1.307	0.433	0.236	1.594	0.134	0.047					M
2442P	Non-reflecting surface, ESD-safe Suitable for gripping flat workpieces With smooth jaws and precision-machined edges	and standard electronics	33.2	11	6	40.5	3.4	1.2	V			A = Jaw leng B = Head witc E = Width of G = Total heir of both t	MEDIUM
		Forming and handling components while	0.91	0.43	0.24		0.2	0.12	A				
531E	Flat nose pliers with replaceable nylon jaws Non-reflecting surface, ESD-safe, high grade tool steel Nylon jaws prevent nicking and scratching	preventing scratching and nicking for miniature and standard electronics	23	11	6		5	3	E	ci	E	A = Jaw leng B = Head wic C = head thic E = Width of i G = Total heig of both ti	ckness tips ght
552S	Wire Stripper: • Suitable for all types of insulation, Teflon®, Tefzel and optical fibres • Unlimited stripping length thanks to side stripping • Suitable for simple and precise stripping of optical fibres • Non-reflecting surface	All Types of Insulation, Teflon, Tefzel					0.433	0.354	G	F			
To est	Robust, high-precision tools for use in electronics and aeronautical engineering The required diameter is set by means of screws Screwdriver and key are included Interchangeable blades ESD-safe Unique precision for damage-free stripping of fine wires	and optical fibers.					11	9		A = Jaw le B = Width of C = Depth E = Total hof G = Length	of tips of intercha eight of bot		de
2411PD	Needle nose pliers with very precise and rounded jaws Non-reflecting surface, ESD-safe Inside serrated jaws for better grip	For miniature and standard electronics application	1.307	0.433	0.236	5.291	0.039	0.047	/	\		/	MEDIUM

	TW	EEZ	ERS	Key	Length (in/	Weight	Micro- Electronics	SMD	croscope	ious ronic	erial	Head Size
	Model	Shape	Description	Applications	mm)	(oz/g)	Mic Electr	S	Micro	Vari		Head
	Brish tell		Suitable for delicate standard applications and precision work on	General purpose use in	4.724	0.49					Stainless	Fine
3SA		Straight	small components or wires Special stainless steel, non-magnetic, non-rusting, acid-proof, heat-resistant	microelectronics, medical and laboratories	120	14		V		V	Steel	Point
102ACAX	102AC	Angled	SMD tweezers, angled 45°, with pointed tips for vertical application, and	SMD with different designs	0.010	0.49						Fine
		3 **	reverse clamping action for easy holding	(chip, MELFs, mini MELFs)	0.25	14	V	>	V	٧	Steel	Point
2ASASL			Precision tweezers with flat rounded tips for gripping, small components. Tip width 2 mm/.078 lnch	Standard gripping applications and assembly jobs on printed-circuit	4.843	0.564						
	1000		Special stainless steel, nonmagnetic, non-rusting, acid-proof, heat-resistant	boards, e.g. in the goldsmith and jewelry industries	123	16	Y	V	\ \	V	Stainless Steel Carbon Steel Stainless Steel	
E3CSA			Ergonomic precision tweezers with long, straight and pointed tips, e.g. for assembly jobs on printed-circuit boards	Standard gripping applications and assembly jobs on printed-circuit	4.724	0.582						
			Thermally insulated, soft foam handles, ESD-safe	boards, e.g. in the goldsmith and jewelry industries	120	17	V	V	V	V	Steel	
			Extraction tweezers for Sub-D	Suitable for extracting	4.724	0.53					Stainless	
024C	cac Weller		connectors.	contacts from the rear of a plug connector	120	15	\	/	V	V		
05004			Precision tweezers with pointed synthetic tips (PPS) and serrated finger grips for secure handling	Microscope, applications	4.724	0.53						
258SA			Volume resistance 16 Ω/cm. Heat- resistant up to 250°C (480°F) Resistant to acids and molten soldering tin. Water-repellent	with acids and molten soldering tin.	120	15			V	V		
141SAP			Wafer tweezers with polyester tips for protecting Si, GaAs or Ti wafers against damage. For 4" – 6" wafers.	All Wafer applications	5.906	1.05					Stainless	
1413AP	3				150	30					Steel	
OOSA		Straight	Precision tweezers with pointed tips. Very robust. Suitable for standard applications, e.g. for assembly in	General purpose use in microelectronics, medical and laboratories Suitable for delicate	4.724	0.71						Fine
			electronics Special stainless steel, non-magnetic, non-rusting, acid-proof, heat-resistant	standard applications and precision work on small components or wires	120	30		V		٧	Steel Stainless Steel	Point
15AGW		Narrow Oblique	Cutting tweezers with narrow oblique head Hardened cutting edges for long service life	Designed for cutting fine soft wires up to dia. 0.25 mm/.010 in. and small	4.528	0.74						0.216 narrowed
		Head	Suitable for cutting fine, soft wires and small components	components	115	21		•		*	Stainless Steel Carbon Steel Stainless Steel Stainless Steel Stainless Steel	to a pt
	31-51		Precision tweezers, curved 30°, relieved Very pointed tips	Applications in biology, medicine, laboratory	4.528	0.42					Stainlass	
51SA			Relieved shape at front of handle provide excellent visibility of the area to be worked on	technology and microelec- tronics	115	12	/	\	V	/	Stainless Steel Carbon Steel Stainless Steel	
7SA		Curved	Precision tweezers, curved, relieved, with pointed tips Bent shape facilitates access to confined spaces	For applications in biology, medicine, laboratory technology and	4.724	0.53						Very Fine
	V		Special stainless steel, nonmagnetic, non-rusting, acid-proof, heat-resistant	microelectronics	120	15		Y		V	Steel	Fille
249CER	(e c	Straight	Precision tweezers with ceramic tips and serrated finger grips for secure handling. Volume resistance	General purpose use in microelectronics,	5.118	0.84						Very
			16 Ω/cm. Heat ⁻ resistant up to 900°C (1500°F). Resistant to acids and molten soldering tin. Water-repellent	medical and laboratories	130	24	٧	٧	V	٧	Steel	Fine
B15AGS		Cutting	Black cutting tweezers with narrow oblique head. For soft wires up to dia. 0.25 mm/.010 Inch	Cutting fine, soft wires and small components	4.528	0.741						
			Hardened cutting edges for long service life	Small components	115	21	*	Ψ	¥	Ψ	Sieei	
29W30	War and	Stripping	Stripping tweezers with synthetic fibre handle. For wires of dia. 0.25 – 0.3 mm/.010 – .011 lnch (AWG 30 – 28).	Stripping fine wires with PVC or Teflon® insulation	4.724	0.99				/		
			For standard and Teflon® insulation		120	28						

The items listed are the most popular Weller Erem products for the electronic's industry.



The Original.

Weller guarantees you the latest and best technology in the soldering market

Industrial Soldering Equipment

Professionalism makes no compromises.

Weller soldering technology that is packed with precision, innovation and quality.

Filtration

Take a deep breath. Providing clean air for your workplace.

Weller filtration systems for continuous use in industrial working environments filters fumes, adhesives and particles and recirculates back clean air while keeping noise pollution to a minimum.

Precision Tools

Feel the difference. The proven choice. Every time.

Manufactured with uncompromising Swiss quality, Precision Tools are designed to be strong, durable, sharp and have the highest precision available. Weller Erem tools are built to last.



GERMANY

Weller Tools GmbH Carl-Benz-Straße 2 74354 Besigheim

Tel: +49 (0) 7143 580-0 Fax: +49 (0) 7143 580-108

CHINA

Apex Tool Group Room 302A, NO 177 Bibo Road Shanghai 201203

Tel: +86 (21) 60880288 Fax: +86 (21) 60880289

USA

Weller

Apex Tool Group, LLC 670 Industrial Drive Lexington, SC 29072

Tel: +1 (800) 688-8949 Fax: +1 (800) 234-0472

